



Bs-Temperature

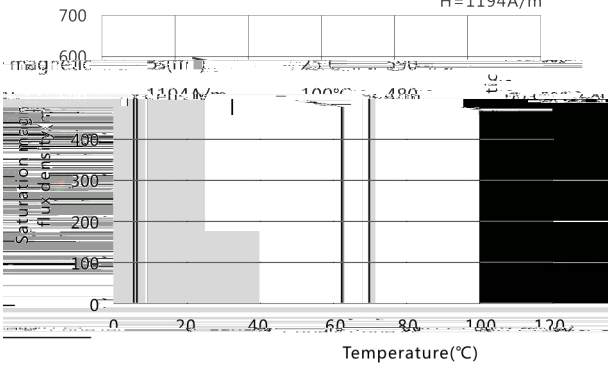

Initial permeability	μ_i	25°C	1600±25%
Remanence	B_r (mT)	25°C	150
		100°C	250
Coercivity	H_c (A/m)	25°C	35
		100°C	30
Core loss	P_{cv} (kW/m ³)	25°C	280
		25kHz 200mT	450
Curie temperature	T_c (°C)		>280


$\times 10^3$

μ_i -Temperature

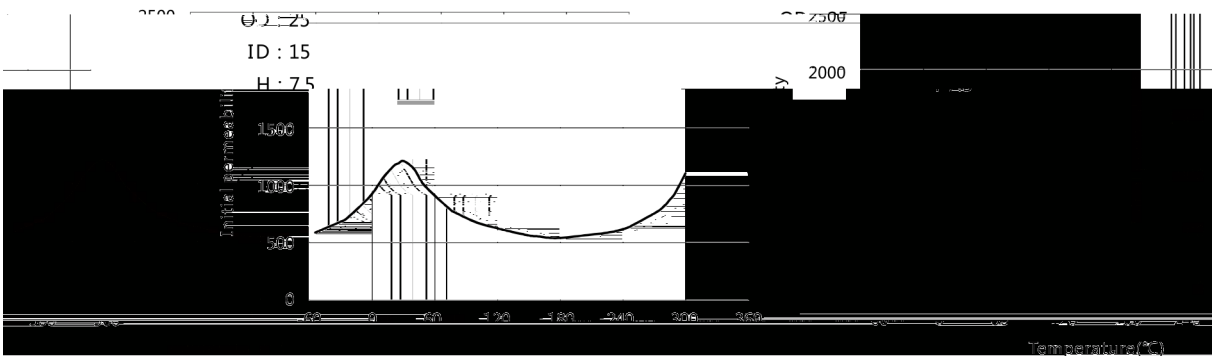

Electrical resistivity	ρ (Ω -m)	5
Density	d (kg/m ³)	4
Test core : Toroid(mm)		

B-H

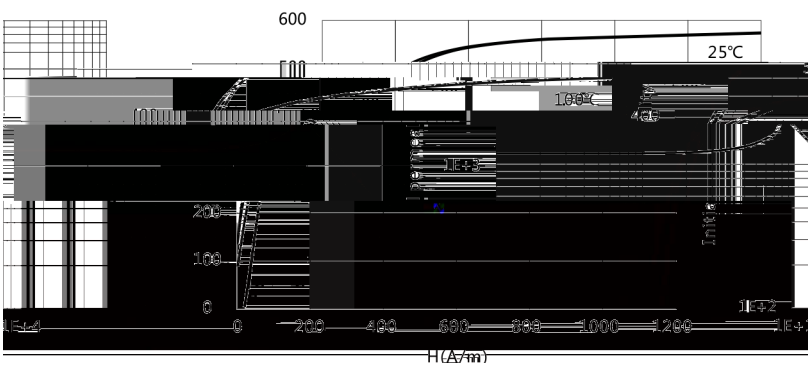

μ_i -Frequency

